


Professional Four BBQ install dimensions for in-built applications

To enable the Professional Four Barbecue (BBQ) head to be used for inbuilt applications, the two "L" shaped brackets (supplied), need to be attached via the same bolt / points that secure the head to a trolley when the BBQ is used for portable installations.

See Customer installation instructions for the location of these bolt / points.

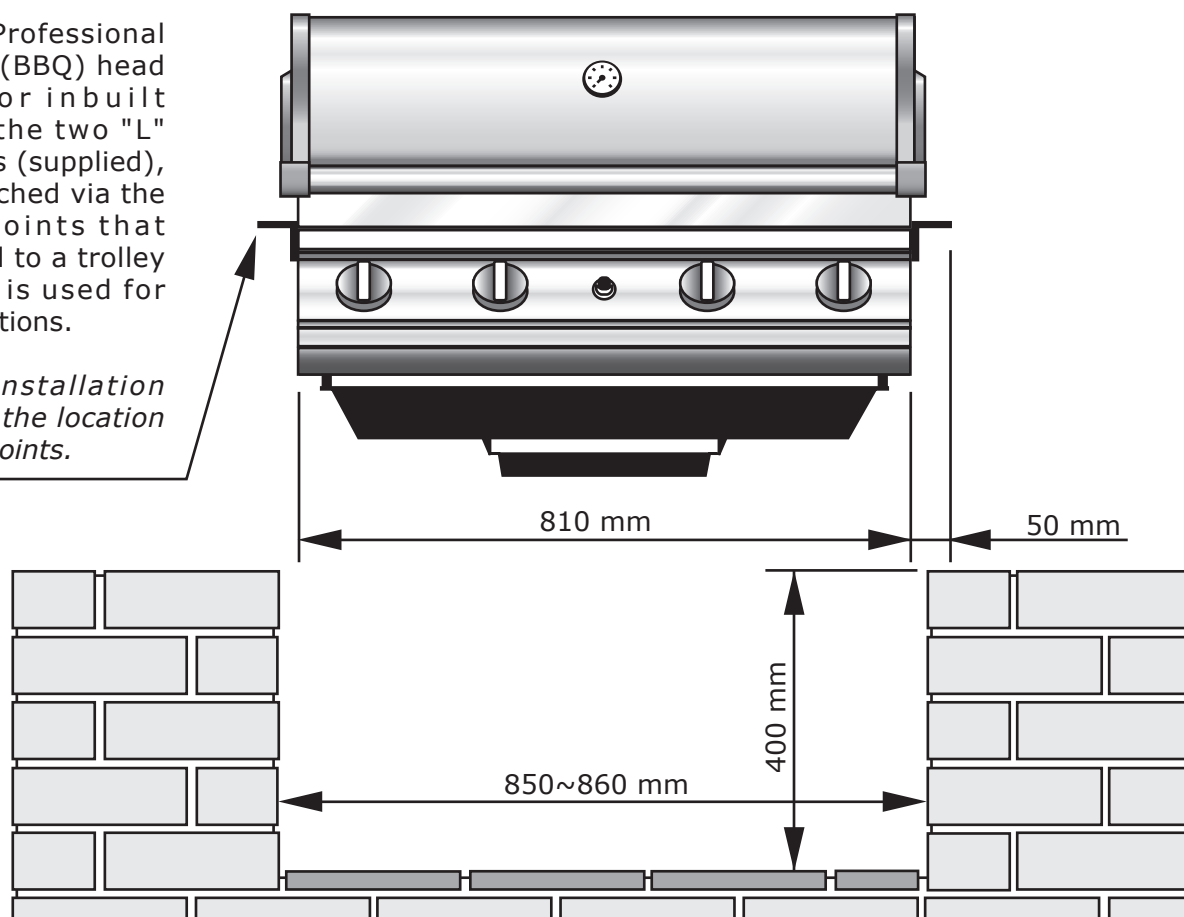


When installing the BBQ head into brickwork, sufficient support on each side of BBQ head **MUST** be incorporated into the design of the supporting structure.

Openings at the rear and side of the appliance, provide air for combustion and must not be obstructed.

The following minimum clearances from Combustible Materials **MUST BE** maintained.

Rear 800 mm (32")

Sides 300 mm (12")

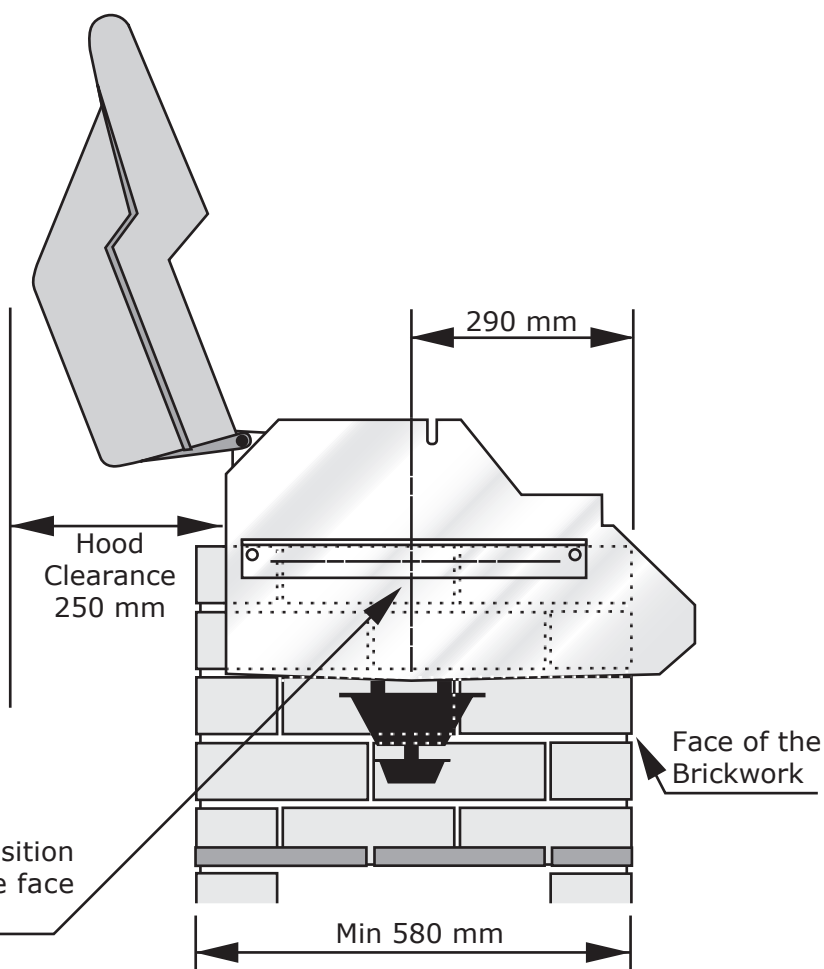

When installing BBQ head into brickwork, position the centre of "L" brackets 290 mm from the face of the brickwork.